

1 **Optimizing the Implementation Orders of Watershed Best Management Practices**
2 **with Time-varying Effectiveness under Stepwise Investment**

3 Shen Shen^{1,2}, Cheng-Zhi Qin^{1,2,3}, Liang-Jun Zhu^{1,2,*}, and A-Xing Zhu^{1,2,3,4,5}

4 | ¹State Key Laboratory of Resources and Environmental Information System, Institute of
5 Geographic Sciences and Natural Resources Research, CAS, Beijing, China

6 | ²College of Resources and Environment, University of Chinese Academy of Sciences, Beijing,
7 China

8 ³Jiangsu Center for Collaborative Innovation in Geographical Information Resource
9 Development and Application and School of Geography, Nanjing Normal University, Nanjing,
10 China

11 ⁴Department of Geography, University of Wisconsin-Madison, Madison, WI, USA

12 ⁵Key Laboratory of Virtual Geographic Environment, Ministry of Education, Nanjing Normal
13 University, Nanjing, China

14

15 Corresponding author: Liang-Jun Zhu (zlj@lreis.ac.cn)

16

17 **Key Points:**

18 • Proposed a novel idea to optimize implementation orders of watershed best management
19 practices (BMPs) under stepwise investment

20 • Introduced net present value to compare net costs of BMP scenarios and BMP's time-
21 varying effectiveness to assess environmental effects

22 • ~~The basic idea of extending BMP optimization to the spatio-temporal level is~~
23 ~~demonstrated through an agricultural watershed case study~~Demonstrated BMP
24 optimization approach in an agricultural watershed case study for forest management
25 BMPs

26

Formatted: Not Superscript/ Subscript

27 **Abstract**

28 Optimizing the spatial configuration of diverse best management practices (BMPs) can provide
29 valuable decision-making support for comprehensive watershed management. Most existing
30 methods focus on BMP type-selection and location-allocation but neglect the BMP
31 implementation time or orders in a management scenario, which ~~is-are most likely often~~
32 restricted by investments. This study proposes a new ~~simulation~~-optimization framework for the
33 implementation orders of BMPs by ~~introducing the using~~ net present value to calculate the
34 economic costs of BMP scenarios, and the ~~process of taking effect~~~~time-varying effectiveness~~
35 of BMPs to evaluate the environmental effectiveness of multistage BMP scenarios. The proposed
36 framework was implemented based on a ~~s~~Spatially ~~E~~explicit ~~I~~ntegrated ~~M~~odeling ~~S~~ystem
37 (~~SEIMS~~) and demonstrated ~~using a small in an~~ agricultural watershed case study. ~~The case study~~
38 ~~optimized the implementation time of four erosion control BMPs in a specific spatial~~
39 ~~configuration scenario -of controlling soil erosion-~~under a 5-year stepwise investment.
40 ~~Experiments focused on optimizing the implementation time of four representative agricultural~~
41 ~~BMPs in a specific spatial configuration scenario.~~The results demonstrated that the proposed
42 method could effectively provide more feasible BMP scenarios with a lower overall investment
43 burden at the cost of a slight loss of environmental effectiveness. ~~Gather~~~~Incorporating time-~~
44 ~~varying BMP effectiveness data and incorporating them~~ ~~Time varying BMP effectiveness in~~
45 ~~watershed modeling and scenario optimization~~ should be adopted extensively to better
46 ~~depict model-~~the effect of BMPs on improving the environment over time. The proposed
47 framework was sufficiently flexible to be ~~transplanted-applied~~ to other technical ~~chains~~
48 ~~implementations~~ and extensible to more actual application cases with sufficient BMP data.
49 Overall, this study demonstrated the basic idea of extending the spatial optimization of BMPs to
50 the spatio-temporal level by considering ~~a~~-stepwise investment. It emphasized the value of
51 integrating physical geographic processes and anthropogenic influences.

52

53 **Plain Language Summary**

54 “When and where to implement which types of best management practices (BMPs) across the
55 watershed to control which environmental issues” are common but complex questions faced by
56 comprehensive watershed management. Multi-objective BMP optimization based on watershed
57 modeling can provide scientific and effective decision support. Existing approaches primarily
58 focus on optimizing the spatial dimension but neglect the temporal dimension, including the
59 optimization of BMP implementation orders to pursue trade-offs between high environmental
60 effectiveness and low economic burden during the implementation period. This study proposed a
61 novel spatio-temporal optimization framework considering two significant factors: stepwise
62 investment and time-varying effectiveness of BMPs. The framework was implemented and
63 demonstrated in an agricultural watershed to optimize BMP implementation plans for controlling
64 soil erosion. Comparative experiments demonstrate that if a small portion of environmental
65 effectiveness can be sacrificed temporarily, optimizations considering the stepwise investment
66 can provide more feasible implementation plans with less financial pressure, especially in the
67 first year of implementation. This study emphasizes the value of integrating physical geographic
68 processes (i.e., the response of the watershed to various spatio-temporal distributions of BMPs)
69 and anthropogenic influences (i.e., stepwise investment) to design, implement, and apply more
70 flexible, robust, and feasible geospatial analysis methods.

Formatted

71

72 **1 Introduction**

73 The scientific and reasonable spatial configuration and optimization of diverse best
74 management practices (BMPs) in the watershed (the BMP scenario) imply a trade-off between
75 environmental effectiveness and economic benefits. Optimized BMP scenarios can provide
76 valuable decision-making support for comprehensive watershed management, including the
77 types and locations of BMPs (Bracmort et al., 2004; Gitau et al., 2006; Veith et al., 2003).
78 Additionally, a feasible watershed management plan often demonstrates “when to implement
79 BMPs” considering available investments and other policy-related factors (Bekele & Nicklow,
80 2005; Liu et al., 2020). Therefore, how to better select BMP types and where and when to
81 implement them are critical issues in optimizing watershed BMP scenarios.

82 The existing optimization methods for watershed BMP scenarios can be categorized into
83 two types. The first is based on identifying priority management areas (PMAs) in the
84 watershed areas (Shen et al., 2015; Wu et al., 2023). A PMA, also known ~~such~~ as the critical
85 source areas (Pionke et al., 2000; Srinivasan et al., 2005), and priority management areas (PMA)
86 (Dong et al., 2018; Shen et al., 2015; Wu et al., 2023). A key area PMA often refers to a small
87 area that produces disproportionately high pollutants. More importantly, it dramatically impacts
88 direct or indirect receiving water bodies (Wu et al., 2023). These areas are common priority areas
89 for implementing BMPs to control eco-environmental problems, including non-point source
90 pollution and soil erosion (Chen et al., 2016; White et al., 2009; Rana & Suryanarayana, 2020).
91 Therefore, after key area PMAs are identified and ranked as priorities, the implementation orders
92 of suitable BMPs in these area PMAs can be designed accordingly (Jang et al., 2013; Shen et al.,
93 2015). However, this approach is based only on the evaluation of current watershed conditions. It
94 does not consider watershed responses to previously selected BMPs step by step during the
95 implementation period. Consequently, such approaches cannot generate optimized BMP
96 implementation orders with multiple stages spanning several years.

97 The second type is intelligent optimization algorithm-based methods that simplify,
98 formulate, and solve the complex optimization problem of selecting and locating BMPs by
99 incorporating watershed modeling (Chen et al., 2016; Srivastava et al., 2002; Veith et al., 2003;
100 Zhu et al., 2021). The optimization problem formulation comprises objectives, geographic
101 decision variables, and constraining conditions (Arabi, Govindaraju, & Hantush, 2006; Zhu et
102 al., 2021). Optimization objectives are often related to multiple and potentially conflicting
103 objectives, including eco-environmental effectiveness and economic investment. A geographic
104 decision variable generally represents the decision to plan, implement, and maintain BMPs in
105 one spatial unit within the study area. A set of decisions determined for all spatial units
106 constitutes a BMP scenario. Constraining conditions refer to restrictive situations for better
107 representing and solving the optimization problem, including spatial constraints (e.g., suitable
108 spatial locations for implementing BMPs and spatial relationships among BMPs) and non-spatial
109 constraints (e.g., limited budgets) (Zhu et al., 2021).

110 Most studies on optimization-based methods focus on determining and optimizing the
111 spatial locations of BMPs from two perspectives. The first is to adopt diverse types of spatial
112 units to define decision variables (Zhu, Qin, et al., 2019). The spatial units adopted in the
113 literature can be classified into five types with different levels in the watershed (Zhu, Qin, et al.,
114 2019): subbasins (Liu et al., 2019), slope position units (Qin et al., 2018), hydrologically

115 connected fields (Wu et al., 2018), farms and hydrologic response units (HRUs) (explicitly
116 referring to HRUs in the SWAT model) (Gitau et al., 2004; Kalcic et al., 2015), and grid cells
117 (Gaddis et al., 2014). The second perspective introduces diverse spatial constraints to ensure that
118 the optimization results have meaningful geographic interpretations and practicability (Kreig et
119 al., 2019; Wu et al., 2018; Zhu et al., 2021). Existing studies have considered three types of
120 spatial constraints: spatial relationships between BMPs and locations, spatial relationships
121 among adjacent BMPs, and spatial characteristic adjustment of spatial units (e.g., unit boundary;
122 Zhu et al., 2021). These studies have significantly improved the reasonability, practicability, and
123 efficiency of optimization methods for watershed BMP scenarios. However, they still follow the
124 ideal assumption that one BMP scenario can be entirely implemented at one time. This signifies
125 that they ignored one critical realistic factor during the optimization: implementation orders of
126 BMPs that are most likely often restricted by stepwise investment (Hou et al., 2020).

127 To the best of our knowledge, few studies have been conducted to optimize BMP
128 implementation orders (Bekele & Nicklow, 2005; Hou et al., 2020). One existing idea is to take
129 all feasible orders of the selected BMPs during a decision-making period on the same type of
130 spatial units (e.g., HRUs) as options for these corresponding decision variables. Consequently,
131 the optimal order configured on each spatial unit usually comprises multiple BMPs, one per year
132 in the decision period (Bekele & Nicklow, 2005). However, such optimization of an
133 implementation order is more focused on every single spatial unit than on all spatial units of one
134 scenario. Another idea is the optimization of BMP scenarios under different investment periods
135 as different optimization problems with independent environmental targets and economic
136 constraints (Hou et al., 2020). These problems are solved in turn, that is, the optimization
137 problem under the first investment is solved first with the result of occupying several spatial
138 units, followed by the next optimization problem occupying the remaining spatial units in the
139 study area. The stepwise optimized BMP scenarios were are then combined (Hou et al., 2020).
140 However, this idea only conducts BMP scenario optimization under diverse investment periods
141 separately and then loosely combines the results instead of considering stepwise investment as an
142 overall constraint in a single optimization problem. Therefore, existing methods cannot optimize
143 BMP implementation orders from a holistic perspective.

144 In summary, research on optimizing BMP scenarios often emphasizes BMP type-
145 selection and location-allocation but neglects one crucial situation during the optimization, which
146 is the implementation orders of BMPs. The few studies assessing the optimization of the
147 implementation orders of BMPs have failed to optimize the BMP implementation orders from a
148 holistic perspective. Therefore, an effective optimization method for the implementation orders
149 of BMPs on all spatial units of the study area under stepwise investment in one optimization
150 problem is still lacking.

151 In this study, we proposed a new simulation-optimization framework for the
152 implementation orders of BMPs considering two important realistic factors: stepwise investment
153 and time-varying BMP effectiveness. This framework extended the existing spatial optimization
154 framework of BMP scenarios (Arabi, Govindaraju, Hantush, et al., 2006; Maringanti et al., 2011;
155 Qin et al., 2018; Zhu et al., 2021) with regard to four aspects: geographic decision variables,
156 BMP scenario cost model, BMP knowledge base, and watershed model. The framework was
157 implemented and exemplified in an agricultural watershed in Southeastern China by considering
158 the optimization problem of maximizing soil erosion reduction rate and minimizing the net cost.

159

160 **2 Methods**

161 2.1 Basic idea

162 The critical issue in optimizing BMP implementation orders under stepwise investment is
 163 the reasonable quantification of the optimization objective, such as the most frequently used
 164 economic cost of BMP scenarios and the environmental effectiveness. This is because, according
 165 to most quantitative methods in existing research, if one complete BMP scenario is divided into
 166 several implementation stages, its economic net cost during the evaluation period (usually
 167 defined as the initial construction cost plus maintenance cost minus benefit) may either remain
 168 the same, increase, or decrease. However, the stepwise implementation of the BMP scenario will
 169 undoubtedly reduce the overall environmental effectiveness as these methods assume that each
 170 BMP has a fixed effectiveness, which is often optimum during the life cycle of the BMP.
 171 Consequently, the comprehensive effectiveness of the BMP scenario is likely to be reduced and
 172 cannot reflect a situation in which stepwise investment is less stressful to decision-makers and
 173 managers. Thus, if the relative loss of environmental effectiveness is acceptable to them,
 174 considering the reduced budget burden, multi-stage implementation under stepwise investment
 175 will be more attractive than a one-time investment. Therefore, the basic idea is to reasonably
 176 quantify the economic net cost and environmental effectiveness of the BMP scenario
 177 implemented in multiple stages, considering the actual economic activity and time-varying
 178 effectiveness ~~process of taking effect~~ of BMPs.

179 The net present value (NPV) is a dynamic economic benefit indicator commonly used in
 180 capital budgeting and investment planning to evaluate the profitability and feasibility of a multi-
 181 year project. Therefore, NPV can be introduced to better represent the economic characteristics
 182 of stepwise investment; ~~that is,~~ The core idea of NPV is that a dollar today is worth more than a
 183 dollar tomorrow (Khan & Jain, 1999; Žižlavský, 2014). The NPV calculates the difference
 184 between the discounted present value of cash inflows and outflows over time. To quantify net
 185 cost (outflow minus inflow), we revised the NPV calculation to the opposite form of its original
 186 formula in economics:


$$187 \quad NPV = \sum_{t=1}^q \frac{O_t - F_t}{(1+r)^t} \quad (1),$$

188 where O_t and F_t are cash outflows and cash inflows, respectively, during period t ; q is the
 189 number of periods; and r is the discount rate set by the investor or project manager (e.g., 10%).

190 For environmental efficiency, adopting time-varying environmental efficiency of BMPs
 191 can overcome the ideal assumption that one BMP can achieve the desired optimal environmental
 192 effectiveness once implemented. Generally, environmental efficiency of BMPs can be quantified
 193 from two perspectives. The first is measuring the direct effect of BMP on its governance
 194 objective, such as the reduction rate of pollutant concentration in the surface flow out of the
 195 vegetation filter strip. The other is measuring the effect of BMP on its related geographic
 196 variables whose changes indirectly affect the governance objective. For example, measuring
 197 improvements in soil properties resulting from returning farmland to forests can be utilized in
 198 simulating the increased infiltration and then reduced surface flow and soil erosion. However, all
 199 these ideal measurements based on field-controlled experiments (Wang et al., 2013; Zhu et al.,
 200 2020) are often time-consuming, laborious, and expensive, especially for time-varying data.
 201 Theoretical analyses based on the mechanisms of BMP can be used as an effective supplement to
 202 a few measured data over time. It is now accepted that the environmental efficiency of BMPs

Formatted: Font: (Default) SimSun, (Asian)
Chinese (PRC)

203 usually changes over time and gradually increases to the optimum in the process of its taking
 204 effect in the first stage of life cycle of the BMP (Bracmort et al., 2004; Emerson & Traver, 2008;
 205 Emerson et al., 2010; Liu et al., 2017). Based on this, Liu et al. (2018) generalized a variety of
 206 possible time-varying curves for the average effectiveness of BMPs (Figure 1). Therefore,
 207 theoretical curves, combined with sampling data in individual years (if available), can be used to
 208 estimate changes in some key BMP parameters characterized in watershed models. In this
 209 manner, we can reasonably model the time-varying effectiveness of BMP and evaluate the
 210 environmental effectiveness of BMP scenarios.

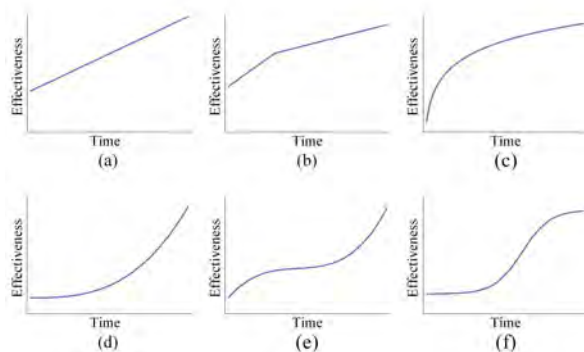


211
 212 Figure 1. Typical theoretical changes of best management practice (BMP) effectiveness over
 213 time for the first stage post implementation [adapted from Liu et al. (2018)]. (a)–(f) represent the
 214 linear, piecewise linear, logarithmic, exponential, polynomial, and logistic changes of BMP
 215 effectiveness over time, respectively.

216 2.2 Overall design

217 To achieve the basic idea, we adopted a widely used simulation-spatial optimization
 218 framework applied to agricultural and urban BMPs (Arabi, Govindaraju, Hantush, et al., 2006;
 219 Maringanti et al., 2011; Raei et al., 2019; Qin et al., 2018; Zhu et al., 2021) and improved it with
 220 respect to four aspects (Figure 2). The first was to extend the geographic decision variables to
 221 represent the implementation time of BMP in initializing and generating BMP scenarios (label 1,
 222 Figure 2). The second improvement was incorporating the NPV indicator into the BMP scenario
 223 cost model (label 2, Figure 2). Thus, the initialized and regenerated scenarios during the
 224 optimization process could be constrained by stepwise investment and screened before being
 225 evaluated. The third improvement supported the time-varying effectiveness of BMPs in the BMP
 226 knowledge base (label 3, Figure 2). The fourth was to improve the watershed model for
 227 application during the simulation (label 4, Figure 2). Subsection 2.3–2.6 of this study present
 228 detailed designs of the four improvements with specific implementations for a small agricultural
 229 watershed case study that aimed to control soil erosion. Moreover, the multi-objective
 230 optimization algorithm should be customized accordingly to handle the extended geographic
 231 decision variables during optimization (Subsection 2.7). The optimized BMP scenarios based on
 232 this framework could provide decision-makers with the option to include implementation plans
 233 for BMPs with multiple stages.
 234

235

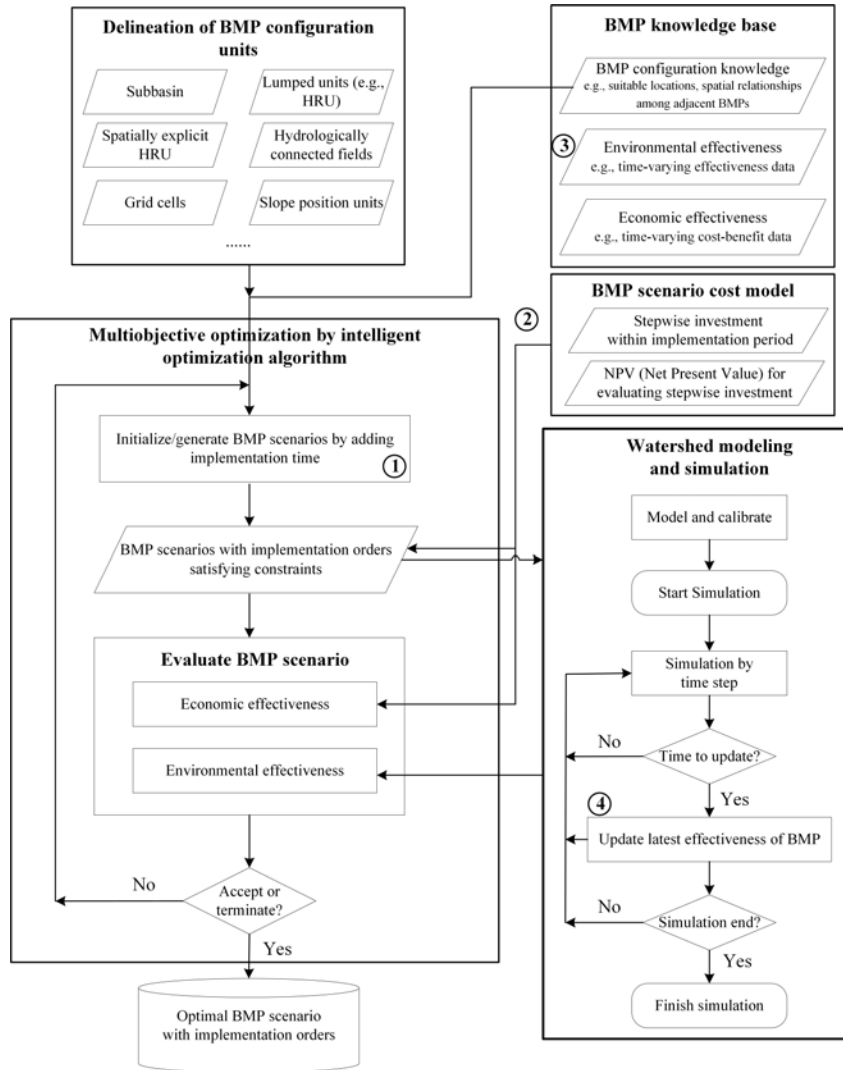

236

237

238

239


240

241

Figure 2. Proposed framework for optimizing implementation orders of best management practices (BMPs) considering their stepwise investment and time-varying effectiveness. Labels 1–4 represent improvements on the already-existing and widely utilized spatial optimization framework of BMP scenarios.

242 2.3 Extending geographic decision variables to represent BMP implementation time

243 Geographic decision variables are normally organized as a one-dimensional array to
 244 encode the spatial configuration information of BMPs, which is convenient for use as a
 245 chromosome in genetic optimization algorithms. Each geographic decision variable uses an
 246 integer value to record the decision on the spatial unit without a BMP (i.e., equals 0) or the type
 247 of BMP (Qin et al., 2018). A reversible and easily extensible encoding approach was proposed
 248 and implemented to represent BMP type and implementation time in one decision variable
 249 (Figure 3).
 250

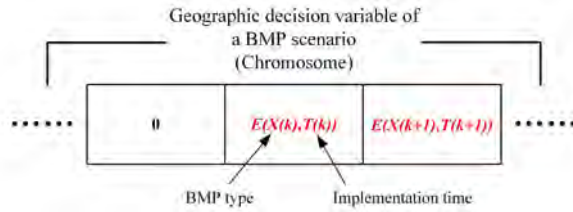

251 Figure 3. Schematic of the extended geographic decision variable of a best management practice
 252 (BMP) scenario. For the spatial unit k in a BMP scenario S , $X(k)$ and $T(k)$ denote the BMP type
 253 and implementation time, respectively. E is the reversible encoding method; for example, if $E =$
 254 $X(k) \times 10 + T(k)$, and if $X(k) = 4$, and $T(k) = 3$, the encoded value is 43. The multiplier 10 can be
 255 scaled up or down in multiples of 10, depending on the number of implementation periods. The
 256 decision variable equals 0 if the spatial unit is not configured with BMP.
 257

258 Therefore, the extended geographic decision variables of a BMP scenario S can be
 259 expressed as follows:

260
$$S(k) = \begin{cases} E(X(k), T(k)) = X(k) \times 10 + T(k), & \text{unit } k \text{ configure a BMP} \\ 0, & \text{otherwise} \end{cases} \quad (2),$$

261 where $k \in [1, n]$, $X(k) \in [1, p]$, $T(k) \in [1, q]$, n is the chromosome length (the number of spatial
 262 units in the study area), p is the number of BMP types, and q is the number of investment periods
 263 (typically in years) for implementing BMPs.

264 With the extended geographic decision variables, the spatial distribution and
 265 implementation time of BMPs can be optimized separately in the solution spaces of $(p+1)^n$ and
 266 q^n , respectively, and simultaneously in an enlarged $(p \cdot q + 1)^n$ solution space. Stepwise investment
 267 can be used as a non-spatial constraint to limit the solution space by setting the minimum and
 268 maximum allowable investment amount for each period.

269 2.4 Extending BMP scenario cost model to calculate NPV

270 As stated in the basic idea, once the geographic decision variable supports the BMP
 271 implementation time, the classical cost calculation of the BMP scenario by simple cost
 272 accumulation is no longer applicable but is still retained for compatibility with the previous
 273 framework. ~~Therefore, we~~ extended the BMP scenario cost model using Equation (1) to
 274 support the calculation of the NPV of the BMP scenario with implementation orders. The annual
 275 cost (e.g., the net cost explained earlier) ~~was is~~ first summarized as a discrete numerical series O
 276 $= \{o_1, o_2, \dots, o_q\}$. The NPV can then be derived by discounting all costs to the beginning year of

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

277 the implementation period, making the net cost of BMP scenarios with different implementation
278 orders comparable.

279 2.5 Extending BMP knowledge base to represent time-varying effectiveness

280 The spatial optimization framework utilized three main types of knowledge (Figure 2):
281 spatial configuration, environmental effectiveness, and economic effectiveness (Zhu, Qin, et al.,
282 2019). The latter two types of knowledge are time related. Environmental effectiveness can be
283 expressed as changes in overall effectiveness corresponding to some specific environmental
284 indices (e.g., total nitrogen reduction rate by vegetated filter strips) or changes in BMP modeling
285 parameters, such as improvements in soil properties (e.g., increased soil conductivity by
286 returning farmland to forests). Economic effectiveness includes cash outflow (e.g., initial
287 implementation and maintenance costs) and inflow (e.g., direct and indirect income).

288 Generally, time-varying data can be represented in two forms: time-related formulae (Liu
289 et al., 2018) and enumerated values. The former is suitable for ideal situations, such as when the
290 mechanism of the effect of BMP is clearly understandable and the formula is derived from long-
291 term environmental observation data. The latter method is relatively simple, flexible, adaptable,
292 and easy to implement. The form of enumerated effectiveness values over time is appropriate
293 when little observational data are available, and the BMP mechanism can be reasonably
294 estimated using theoretical curves (Figure 1). Therefore, the form of enumerated values for
295 knowledge of environmental and economic effectiveness was implemented in this study as an
296 example to verify the proposed framework. All time-related effectiveness data were prepared as
297 arrays with a user-defined time interval and period.

298 2.6 Extending watershed model to apply time-varying environmental effectiveness of 299 BMPs


300 Unlike updating watershed parameters related to the fixed effectiveness of BMPs (e.g.,
301 soil hydraulic properties) at the beginning of watershed simulation in most existing watershed
302 models, the environmental evaluation of BMP scenarios considering implementation orders
303 requires an iteration updating process during the simulation (Figure 2). When the simulation time
304 ~~step~~ is incremented, the model verifies whether it is time to update the following BMP
305 effectiveness data: if the simulation time meets the preset update time, the model updates the
306 relevant parameters and conducts subsequent simulations with the updated parameters until the
307 next update time is reached or the entire simulation period ends (Figure 2).

308 To support the iterative update of time-varying environmental effectiveness data of the
309 BMP, a source code-level improvement for the watershed models is required. The **S**patially
310 **E**xplicit **I**ntegrated **M**odeling **S**ystem (SEIMS), which has been developed over the past few
311 years (Liu et al., 2014; Liu et al., 2016; Zhu, Liu, et al., 2019) was adopted as the watershed
312 modeling framework to implement this improvement (Shen & Zhu, 2022). SEIMS has been
313 successfully utilized in the spatial optimization of BMP scenarios with diverse types of spatial
314 units and spatial configuration knowledge (Qin et al., 2018; Zhu et al., 2021; Zhu, Qin, et al.,
315 2019).

316 2.7 Customizing a multi-objective optimization algorithm to handle the extended
 317 geographic decision variables

318 The non-dominated sorting genetic algorithm (NSGA-II) (Deb et al., 2002) is as one of
 319 the most efficient algorithms for multi-objective optimization problems and has been extensively
 320 employed in the spatial optimization of BMP scenarios (Babbar-Sebens et al., 2013; Kalcic et al.,
 321 2015; Maringanti et al., 2011; Qin et al., 2018; Wu et al., 2018). This study adopted NSGA-II as
 322 an intelligent optimization algorithm with customization of its crossover and mutation operators
 323 to support the regeneration process of BMP scenarios considering implementation time (Figure
 324 2).

325 Because the extended geographic decision variables include both BMP type and
 326 implementation time information, crossover and mutation operators designed accordingly can be
 327 conducted on them separately and simultaneously. For example, Figure 4 depicts a two-point
 328 crossover operation on implementation time only, that is, the second number in the genes of the
 329 two-parent individuals S_a and S_b between two randomly selected cross points m_1 and m_2 are
 330 swapped.

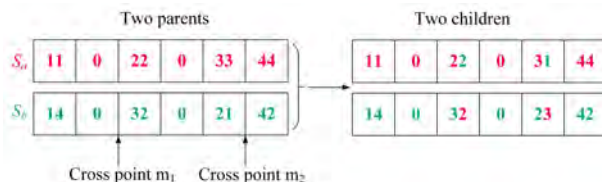

331
 332 Figure 4. Example of the two-point crossover operator of two parents S_a and S_b on
 333 implementation time only. To facilitate the demonstration, the first number of each gene denotes
 334 best management practice (BMP) type, and the second number represents implementation time.

335 The mutation operator iterates over each gene value of the new child individual to
 336 conduct mutation (i.e., change the original value to one of the applicable values) according to a
 337 small probability ρ . If a randomly generated number between 0 and 1 is less than ρ , mutation
 338 occurs. The proposed framework allows users to determine whether the mutation object is the
 339 BMP type, implementation time, or both, according to the application.

340 **3 Experimental designs**

341 To verify the rationality and validity of the proposed simulation-optimization framework
 342 for BMP implementation orders, we implemented a new optimization tool. It is based on our
 343 former distributed watershed modeling and BMP optimization studies on slope position units, as
 344 introduced in the last section. The follow-up case study aimed at optimizing BMP
 345 implementation plans for controlling soil erosion under a 5-year stepwise investment in a
 346 representative agricultural watershed in the red-soil region of Southeastern China.

347 **3.1 Study area and data**

348 The study area was the Youwuzhen watershed (approximately 5.39 km²) in Hetian Town,
 349 Changting County, Fujian Province, China (Figure 5). This small watershed belongs to the Zhuxi
 350 River watershed, a first-level tributary of the Tingjiang River, and is located between 25° 40' 13"
 351 N, 116° 26' 35" E and 25° 41' 29" N, 116° 28' 40" E. The primary geomorphological
 352 characteristics are low mountains and hills. The elevation ranges from 295.0 to 556.5 m with an

Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic


Formatted: Font: Not Italic

Formatted: Font: Not Italic

Formatted: Font: Not Italic

353 average slope of 16.8°. The topographic trend inclines from northeast to southwest and the
 354 riverbanks are relatively flat and wide. It has a mid-subtropical monsoon moist climate, with an
 355 annual average temperature of 18.3 °C and precipitation of 1697 mm (Chen et al., 2013).
 356 Precipitation is characterized by concentrated and intense thunderstorm events, and the total
 357 rainfall from March to August accounts for 75.4% of the entire year. The main land-use types are
 358 forests, paddy fields, and orchards, with area ratios of 59.8%, 20.6%, and 12.8%, respectively.
 359 Additionally, the study area is dominated by secondary or human-made forests with low
 360 coverage owing to the destruction of vegetation by soil erosion and economic development
 361 (Chen et al., 2013). The soil types in the study area are red soil (78.4%) and paddy soil (21.6%),
 362 which can be classified as *Ultisols* and *Inceptisols* as per the US Soil Taxonomy, respectively
 363 (Shi et al., 2010). Red soil is predominantly distributed in hilly regions, while paddy soil is
 364 distributed primarily in broad alluvial valleys with a similar spatial pattern as that of the land use
 365 of paddy rice. The study area is within one of the counties with the most severe soil erosion in
 366 ~~the~~-Southern China. The soil erosion type ~~is~~was ~~severe~~ ~~majorly~~ ~~severe~~ ~~and~~ ~~moderate~~ water
 367 erosion, which is ~~a~~ typical and representative of Changting County soil erosion type in the study
 368 area.

369

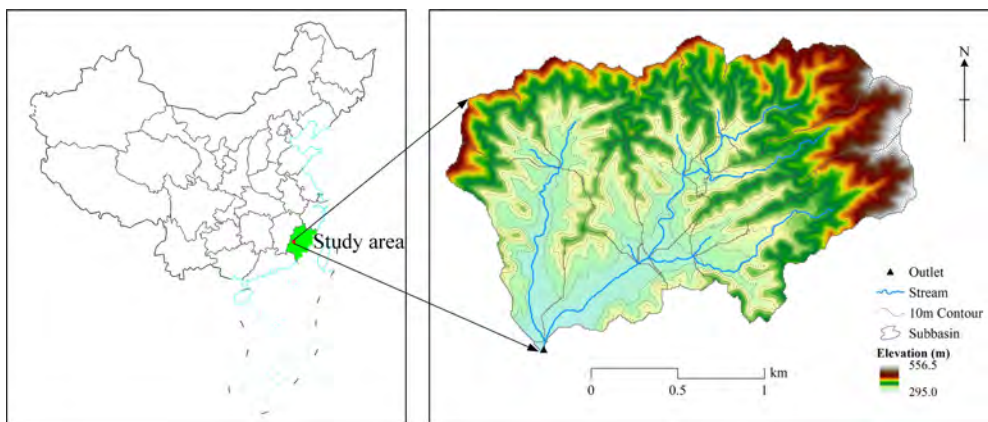

370

371 Figure 5. Map of Youwuzhen watershed in Changting County, Fujian Province, China

372 The basic spatial data collected for watershed modeling of the Youwuzhen watershed
 373 included a gridded digital elevation model, soil type map, and land-use type map, all of which
 374 were unified to a 10 m resolution (Qin et al., 2018). Each soil type properties were measured
 375 from field samplings (e.g., organic matter and mechanical composition; Chen et al., 2013) and
 376 derived from the Soil-Plant-Air-Water (SPAW) model (e.g., field capacity and soil hydraulic
 377 conductivity; Saxton and Rawls, 2006). Land use or land cover-related parameters were
 378 referenced from the SWAT database (e.g., Manning's roughness coefficient; Arnold et al., 2012)
 379 and relevant literature (e.g., cover management factor for the universal soil loss equation
 380 [USLE]; Chen et al., 2019). Daily climate data from the nearest national weather station,
 381 including temperature, relative moisture, wind speed, and sunshine duration hours from 2011 to
 382 2017, were derived from the National Meteorological Information Center of the China
 383 Meteorological Administration. Moreover, daily precipitation data from one local monitoring
 384 station were also collected. The watershed outlet periodic site monitoring streamflow and

385 sediment discharge data from 2011 to 2017 were provided by the Soil and Water Conservation
 386 Bureau of Changting County. The streamflow and sediment discharge data were screened by a
 387 rule that required complete rainstorms records with more than three consecutive days for
 388 watershed modeling due to limited data quality (Qin et al., 2018).

389 3.2 BMP knowledge base

390 We selected four representative BMPs that have been widely implemented in Changting
 391 County for soil and water conservation: closing measures (CM), arbor–bush–herb mixed
 392 plantations (ABHMP), low-quality forest improvement (LQFI), and economic fruit (EF). Table 1
 393 lists the brief descriptions, which mainly include the spatial configuration knowledge (Figure 2).

394
 395
 396

Table 1. Brief description of four best management practices (BMPs) considered in this study
 [adapted from (Qin et al., 2018)]

BMP	Brief description
Closing measures (CM)	Closing the ridge area and/or upslope positions from human disturbance (e.g., tree felling and forbidding grazing) to facilitate afforestation.
Arbor–bush–herb mixed plantation (ABHMP)	Planting trees (e.g., <i>Schima superba</i> and <i>Liquidambar formosana</i>), bushes (e.g., <i>Lespedeza bicolor</i>), and herbs (e.g., <i>Paspalum wettsteinii</i>) in level trenches on hillslopes.
Low-quality forest improvement (LQFI)	Improving infertile forest located in the upslope and steep backslope positions by applying compound fertilizer on fish-scale pits. Building new orchards on the middle and down slope positions or improving them under superior water and fertilizer conditions by constructing level terraces, drainage ditches, storage ditches, irrigation facilities and roads,
Economic fruit (EF)	planting economic fruit (e.g., chestnut, waxberry), and interplanting grasses and Fabaceae (<i>Leguminosae</i>) plants.

397 The environmental effectiveness of BMPs in controlling soil erosion can be reflected by
 398 improvements in soil properties, including organic matter, bulk density, texture, and hydraulic
 399 conductivity. The Soil and Water Conservation Bureau of Changting County selected 50 sample
 400 plots in the study area in 2000, including the four BMP types mentioned above. Intensive eroded
 401 plots with similar basic conditions including soil type, landform, and parent material were
 402 selected as control plots. The physical and chemical properties of all the plots were measured in
 403 2005. The change ratio of the soil properties under each BMP to the control plot was considered
 404 as environmental effectiveness over five years. Combining these measured data and determining
 405 the soil stable infiltration rate by Lin (2005), this study assumed that key soil parameters
 406 fluctuate reasonably in specific years post BMP implementation. The time-varying changes in
 407 BMP effectiveness can be characterized predominantly by one of the functions depicted in
 408 Figure 1, including linear functions, first fast and then slow functions, first slow and then fast
 409 functions, and so on. Other derived properties and parameters utilized in the SEIMS model were
 410 prepared accordingly, including total porosity and soil erodibility factor.

411 The annual data on environmental effectiveness and cost–benefit knowledge of the four
 412 BMPs are depicted in Table 2. For example, after implementing CM, the organic matter (OM)
 413 would increase in ratios of 1.50, 1.62, 1.69, 1.74, and 1.77, respectively, within five years. The
 414 relative changes in the conservation practice factor USLE_P of the USLE in Table 2 were
 415 adopted from one calibrated SWAT model for this area (Chen et al., 2013), which maintained the
 416 same value within five years.

417 Table 2. Environmental effectiveness and cost–benefit knowledge of the four best management practices (BMPs) within five years
 418 post implementation

BMP	Year	Environmental effectiveness ^a						Cost–benefit (CNY 10,000/km ²)		
		OM	BD	PORO	SOL_K	USLE_K	USLE_P	Initial	Maintain	Benefits
CM	1	1.50	0.98	1.02	2.21	0.78	0.90	15.50	1.50	0.00
	2	1.62	0.97	1.03	4.00	0.99	0.90	0.00	1.50	0.00
	3	1.69	0.95	1.05	3.35	0.70	0.90	0.00	1.50	2.00
	4	1.74	0.94	1.06	3.60	0.60	0.90	0.00	1.50	2.00
	5	1.77	0.92	1.08	5.24	0.26	0.90	0.00	1.50	2.00
ABHMP	1	1.30	0.99	1.01	1.39	0.71	0.50	87.50	1.50	0.00
	2	1.36	0.98	1.02	1.38	0.89	0.50	0.00	1.50	0.00
	3	1.40	0.97	1.03	1.26	0.76	0.50	0.00	1.50	6.90
	4	1.42	0.96	1.04	1.15	0.75	0.50	0.00	1.50	6.90
	5	1.42	0.95	1.05	1.07	0.80	0.50	0.00	1.50	6.90
LQFI	1	2.80	0.98	1.02	1.54	0.88	0.50	45.50	1.50	0.00
	2	3.22	0.96	1.04	2.00	0.80	0.50	0.00	1.50	0.00
	3	3.47	0.94	1.07	2.76	0.60	0.50	0.00	1.50	3.90
	4	3.66	0.92	1.09	2.53	0.69	0.50	0.00	1.50	3.90
	5	3.80	0.90	1.11	2.38	0.73	0.50	0.00	1.50	3.90
EF	1	1.20	0.99	1.01	0.90	1.10	0.75	420.00	20.00	0.00
	2	1.23	0.98	1.02	1.16	1.06	0.75	0.00	20.00	0.00
	3	1.25	0.96	1.04	0.95	0.70	0.75	0.00	20.00	0.00
	4	1.26	0.95	1.05	1.60	0.65	0.75	0.00	20.00	0.00
	5	1.30	0.94	1.06	1.81	0.76	0.75	0.00	20.00	60.30

419 Note. ^a Environmental effectiveness of BMPs includes soil property parameters [organic matter (OM), bulk density (BD), total
 420 porosity (PORO), and soil hydraulic conductivity (SOL_K)] and universal soil loss equation (USLE) factors [soil erodibility
 421 (USLE_K) and conservation practice factor (USLE_P)]. Values in each column represent relative changes (multiplying) and, thus,
 422 have no units.

423 CM, closing measures; ABHMP, arbor–bush–herb mixed plantation; LQFI, low-quality forest improvement; EF, economic fruit.


424

425 The economic data of these BMPs were estimated by Wang (2008) according to the price
 426 standard adopted 15 years ago. Although this is no longer applicable to the current price
 427 standards, it is still suitable for evaluating the relative net cost among the BMP scenarios. Owing
 428 to the long estimation cycle of the economic benefits of soil and water conservation projects, the
 429 direct economic benefits of the four BMPs; (e.g. for example, fruit production growth and forest
 430 stock volume) are generally calculated from the third (e.g., CM, ABHMP, and LQFI) or fifth
 431 year (e.g., EF) post implementation.

432 3.3 Calibrated watershed model and selected BMP scenario from former study

433 To simulate daily soil erosion in the Youwuzhen watershed, we adopted the SEIMS-
 434 based watershed model that considers gridded cells as the basic simulation unit constructed and
 435 calibrated by Zhu, Qin, et al. (2019). The details of the selected watershed process and
 436 calibration and validation of watershed outlet streamflow and sediment discharge can be found in
 437 Zhu, Qin, et al. (2019).

438 To perform the optimization on the temporal dimension and evaluate the impact of
 439 stepwise investment and time-varying effectiveness of BMPs on the BMP implementation plans,
 440 we selected an optimized BMP scenario (Figure 6) from Zhu, Qin, et al. (2019) as the
 441 fundamental spatial scenario. The selected BMP scenario considers a simple system of three
 442 types of slope positions (ridge, backslope, and valley) as the BMP configuration units, which
 443 have been proven to be effective in the previous studies undertaken by us (Qin et al., 2018; Zhu,
 444 Qin, et al., 2019). In this scenario, ABHMP occupied the most prominent area, with large clumps
 445 distributed over the west, central, and northeast ridge, backslope, and valley. LQFI was
 446 concentrated on the backslope in the middle region. CM was scattered on the west, central, and
 447 east ridges and backslope. EF occupied the smallest area in the central valley.

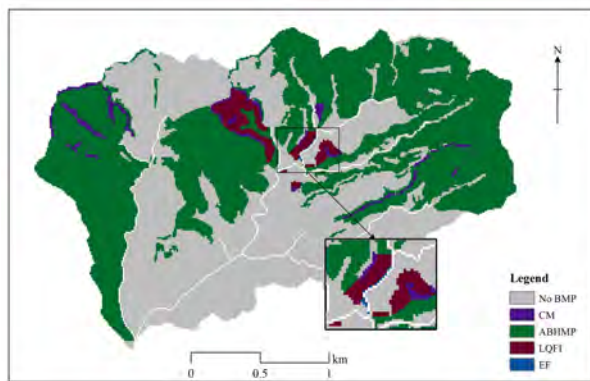

448 Figure 6. Spatial distribution of the selected BMP scenario based on slope position units from
 449 Zhu, Qin, et al. (2019). Partially enlarged details of the configured economic fruit (EF) practice
 450 along the river have also been depicted (white lines).
 451

452

453

454 3.4 Multi-objective BMP scenarios optimization

455 The multi-objective of this case study was to maximize the soil erosion reduction rate and
456 minimize the net cost of a BMP scenario. The optimization problem can be formulated as
457 follows:

$$458 \quad \min\{-f(S), g(S)\} \quad (4),$$

459 where $f(S)$ and $g(S)$ denote the reduction rate of soil erosion and net cost of BMP scenario S ,
460 respectively. $f(S)$ is calculated by the average soil erosion reduction rate after implementing
461 scenario S with implementation orders, as follows:

$$462 \quad f(S) = \sum_{t=1}^q f(S, t) / q = \sum_{t=1}^q \frac{V(0) - V(S, t)}{V(0)} \times 100\% / q \quad (5),$$

463 where t is the implementation period, q is the total number of time periods, $f(S, t)$ represents the
464 reduction rate of soil erosion within period t , and $V(0)$ and $V(S, t)$ are the total amounts of
465 sediment yields from hillslope routed into the channel (kg) under the baseline scenario and S
466 scenario, respectively, in period t .

467 $g(S)$ can be calculated by the net cost of implementing scenario S with implementation
468 order scheme T using the NPV defined in Equation (1). The cash outflow O_t and inflow F_t of S at
469 time t were calculated using Equations (6) and (7), respectively:

$$470 \quad O_t = \sum_{k=1}^n O(S, k, t) = \sum_{k=1}^n \begin{cases} A(X(k), t) * \{C(X(k)) + M(X(k), t)\}, & \text{if } t \geq T(k) \\ 0, & \text{if } t < T(k) \end{cases} \quad (6),$$

$$471 \quad F_t = \sum_{k=1}^n F(S, k, t) = \sum_{k=1}^n \begin{cases} A(X(k), t) * B(X(k), t), & \text{if } t > T(k) \\ 0, & \text{if } t \leq T(k) \end{cases} \quad (7),$$

472 where $A(X(k), t)$ is the configured BMP area on the k th spatial unit in time t ; $C(X(k))$, $M(X(k), t)$,
473 and $B(X(k), t)$ are the initial construction cost, annual maintenance cost, and annual benefit per
474 unit area, respectively (Table 2).

475 The parameter settings for the NSGA-II algorithm included an evolutionary generation of
476 100, a population number of 100, a crossover rate of 0.8 for the two-point crossover operator, a
477 mutation rate of 0.1, and a selection probability of 0.8. The reference point for calculating the
478 hypervolume index was set to (300, 0), which denotes the worst scenario: a net cost of 300 (CNY
479 10,000) and a soil erosion reduction rate of zero. To improve the computing efficiency of
480 numerous executions of the SEIMS model required by the optimization algorithm, the Tianhe-2
481 supercomputer (Liao et al., 2014), one of the fastest supercomputers in the world, was utilized to
482 take full advantage of the parallelizability of the SEIMS (Zhu, Liu, et al., 2019), that is,
483 occupying a maximum of 10 nodes and executing four SEIMS models per node simultaneously.

484 3.5 Comparative experiments

485 Based on the selected spatial distribution of BMPs from the former study, we designed
486 four comparative experiments to evaluate the effects of stepwise investment and the time-varying
487 effectiveness of BMPs on the optimized implementation plans:

- 488 ● Stepwise investment and fixed BMP effectiveness (STEP + FIXED)
- 489 ● One-time investment and fixed BMP effectiveness (ONE + FIXED)

- 490 ● Stepwise investment and time-varying BMP effectiveness (STEP + VARY)
- 491 ● One-time investment and time-varying BMP effectiveness (ONE + VARY)


492 Experiments with fixed BMP effectiveness used the stable environmental effectiveness
 493 data of BMPs in this case study, that is, data in the fifth year post implementation (Table 2). For
 494 the one-time investment, we assumed that all funds would be available at the beginning of a
 495 specific year in the implementation period and that all BMPs would be implemented within the
 496 same year. Therefore, each experiment with one-time investment had only five solutions.
 497 Simultaneously, experiments with a stepwise investment needed to be optimized, resulting in
 498 near-optimal Pareto solutions (also termed as Pareto fronts).

499 The experimental design followed three assumptions for implementing of a target BMP
 500 scenario:

- 501 ● Once a spatial unit was configured with a BMP in a certain year, the BMP type would
 502 not change throughout the subsequent evaluation periods.
- 503 ● The number of BMPs that could be implemented within a year was unlimited, ranging
 504 from zero to the total number of spatial units n .
- 505 ● Each BMP type could be implemented on any spatial unit within one year and would
 506 start to take effect in the subsequent year.

507 The simulation period for each SEIMS-based model was from 2011 to 2017 (Figure 7).
 508 The environmental effectiveness and cost–benefit data of the four BMPs listed in Table 2 were
 509 input within the model with a one year update interval. The implementation period for the BMP
 510 scenario was from 2012 to 2016. At the end of each year, the model parameters affected by
 511 BMPs (i.e., soil properties of spatial units with BMPs; Table 2) would be updated (red dots in
 512 Figure 7), including the newly and previously implemented ones. Therefore, the period of BMPs
 513 taking effect in this study lasted from 2013 to 2017.

514

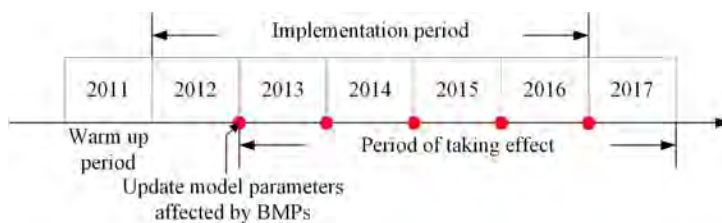

515

516 Figure 7. Schematic diagram of the watershed model simulation periods for evaluating a best
 517 management practice (BMP) scenario.

518 The selected BMP scenario required 207.35 (CNY 10,000) for the initial construction and
 519 subsequent maintenance costs before making a profit (the first two years) (Zhu, Qin, et al.,
 520 2019b). To conduct experiments with stepwise investment, gradually decreased investments
 521 were designed within the 5-year implementation period, specifically, 90, 70, 30, 20, and 20
 522 (CNY 10,000). The maximum available investment was set to increase by 10% to generate
 523 eligible scenarios more quickly. The discount rate was set to 0.1. All cash flows during the
 524 implementation period were discounted to values in the first year of the implementation period
 525 (2012).

526 3.6 Evaluation methods

527 We compared and discussed the four comparative experiments from two perspectives.
528 From the numerical perspective, we evaluated all solutions under two objectives. From the
529 qualitative perspective, we analyzed characteristics of selected solutions considering BMP
530 implementation orders.

531 In this case study, two aspects were considered in the numerical evaluation of BMP
532 scenarios under the two objectives. One is intuitive comparison by plotting Pareto fronts from
533 stepwise investment experiments and BMP scenarios from one-time investment experiments as
534 scattered plots. The other is using quantitative index to measure the overall quality of the Pareto
535 fronts, such as, the commonly used hypervolume index (Zitzler et al., 2003). In this study, the
536 larger the hypervolume, the better the Pareto front. Additionally, changes in the hypervolume
537 index with evolutionary generations could provide a qualitative reference for optimization
538 efficiency. In an ideal optimization process, the hypervolume initially rises rapidly, then
539 gradually slows down, and finally stabilizes. The faster the hypervolume becomes stable, the
540 higher the optimization efficiency (Zhu, Qin, et al., 2019).

541 To qualitatively evaluate the BMP implementation orders characteristics under the
542 impacts of stepwise investment and time-varying BMP effectiveness, typical scenarios were
543 selected and compared based on their temporal distributions. Three selection criteria were
544 designed: high NPV with high soil erosion reduction rate (HH), low NPV with low soil erosion
545 reduction rate (LL), and moderate NPV with moderate soil erosion reduction rate (MM).


546

547 **4 Experimental results and discussion**

548 4.1 Numerical evaluation of BMP scenarios under two objectives

549 The BMP scenarios derived from the four experiments are plotted as scatter points with
550 the NPV and soil erosion reduction rate as axes (Figure 8a). Two comparisons between stepwise
551 and one-time investments (STEP + FIXED vs. ONE + FIXED and STEP + VARY vs. ONE +
552 VARY) demonstrated the same distribution patterns. The NPV and reduction rate of soil erosion
553 of the one-time investment solutions (ONE + VARY and ONE + FIXED) descended
554 synchronously from the top right (ONE-1) to the bottom left (ONE-5, which denotes investment
555 in the fifth year). The ONE + FIXED scenario that invested in the first year (the existing method,
556 labeled as ONE-1 + FIXED in Figure 8a) required the greatest NPV (163, the unit is CNY
557 10,000) to achieve the most significant soil erosion reduction rate (7.42%). The Pareto fronts
558 under stepwise investment were densely distributed near the ONE-2 solutions and took dominant
559 positions. Figure 8b depicts an enlarged area of 150–156 NPV with a reduction rate of soil
560 erosion at 3.5–7.0% to highlight this pattern. The best soil erosion reduction rates under stepwise
561 investment were approximately 0.8–0.9% lower than those under ONE-1 scenarios saving about
562 7.7 NPV and about 0.4% higher than those of ONE-2 scenarios requiring similar NPVs. In
563 general, the proposed optimization method of BMP implementation orders considering stepwise
564 investment could effectively provide more choices with less investment burden at the cost of a
565 slight loss of environmental effectiveness.

566

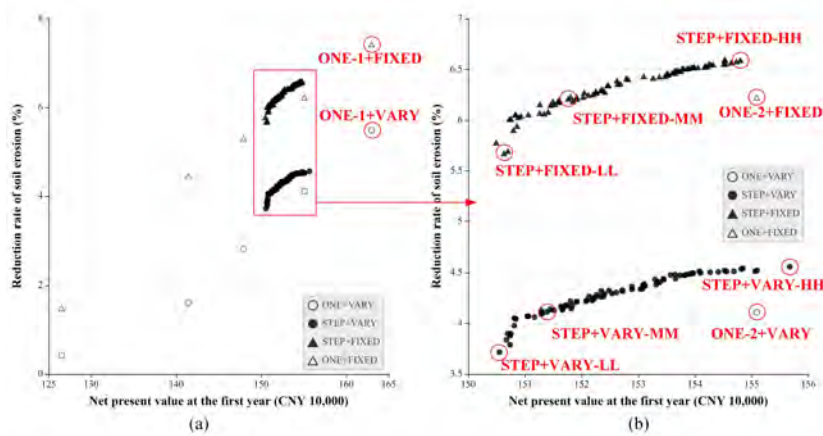

567 Figure 8. Comparison of best management practice (BMP) scenarios derived from the four
 568 comparative experiments: (a) overall comparison; (b) zoomed in area at approximately 150–156
 570 NPV (CNY 10,000) with a soil erosion reduction rate of 3.5–7.0%. STEP: stepwise investment;
 571 ONE- n : one-time investment in the n^{th} year; FIXED: fixed effectiveness of BMP; VARY: time-
 572 varying effectiveness of BMP; LL: low NPV and low soil erosion reduction rate; MM: moderate-
 573 moderate; HH: high-high.

574
 575 Six representative scenarios were selected from the two STEP Pareto fronts to make more
 576 specific comparisons with the two ONE-2 scenarios, as depicted in Figure 8b (e.g., STEP +
 577 VARY-HH, STEP + VARY-MM, STEP + VARY-LL, and ONE-2 + VARY). One scenario with
 578 the same soil erosion reduction rate as the ONE-2 scenario was selected as the MM scenario.
 579 Conversely, LL scenario was set as the one with the lowest NPV and reduction rate and HH
 580 scenario as the highest NPV and reduction rate. Table 3 enlists the NPV in the first year and the
 581 detailed investments (including initial and maintenance investments, i.e., the cash outflow of the
 582 NPV) in different years for the selected scenarios.

583 In addition to the similar pattern of the two Pareto fronts under stepwise investment
 584 (STEP + VARY and STEP + FIXED), the changes in the hypervolume index with generations
 585 for the two optimization experiments also demonstrated similar changing trends (Figure 9).
 586 Although the STEP + VARY hypervolume seemed to first attain stability in the 65th generation,
 587 while STEP + FIXED demonstrated a slowly increasing trend, we believed that they both had
 588 similar evolution characteristics without significant differences in optimization efficiency under
 589 the current experimental settings of the NSGA-II algorithm. The only difference between the two
 590 experiments, which considered the time-varying effectiveness of BMP, was the cause of the
 591 overall high hypervolume index of STEP + FIXED, as depicted in Figure 9. This result could be
 592 expected because the experiments with fixed BMP effectiveness used data from the fifth year
 593 (Table 2), which was the optimum effectiveness during the evaluation period of this study. The
 594 hypervolume index proved that optimization under stepwise investment could enlarge the
 595 solution space and derive better BMP scenarios.

596

597 Table 3. Net present value (NPV) in the first year and detail investments (including initial and maintenance investments, i.e., the cash
 598 outflow part of the NPV) in different years of selected scenarios (STEP: stepwise investment; ONE- n : one-time investment in the n^{th}
 599 year; FIXED: fixed effectiveness of best management practice [BMP]; VARY: time-varying effectiveness of BMP; LL: low NPV and
 600 low reduction rate of soil erosion; MM: moderate-moderate; HH: high-high)

	ONE-2 + FIXED	STEP + FIXED			ONE-2 + VARY	STEP + VARY		
		LL	MM	HH		LL	MM	HH
NPV (CNY 10,000)	155.09	150.63	151.77	154.80	155.09	150.55	151.39	155.67
Soil erosion reduction rate (%)	6.22	5.67	6.20	6.59	4.11	3.72	4.11	4.56
1 st investment (CNY 10,000)	0.00	55.31	72.80	85.53	0.00	57.94	76.28	88.40
2 nd investment	203.75	67.36	57.35	67.57	203.75	62.77	44.56	69.82
3 rd investment	3.60	31.87	25.53	29.68	3.60	31.86	32.31	33.07
4 th investment	3.60	27.42	28.23	14.56	3.60	28.81	29.32	10.83
5 th investment	3.60	30.63	29.39	17.23	3.60	31.16	30.64	12.80

601

602

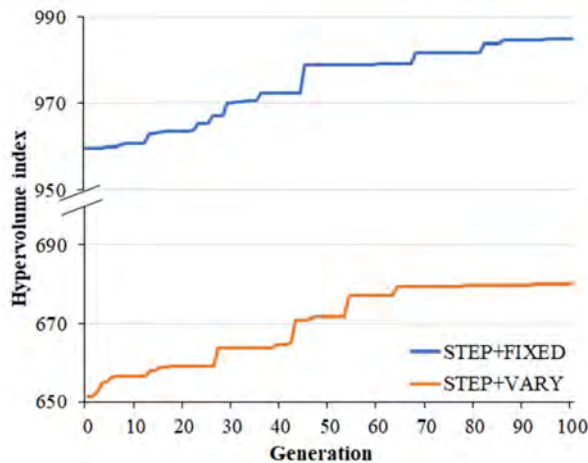


Figure 9. Changes in the hypervolume index with generations for two optimization experiments under stepwise investment (STEP + VARY denotes the optimization using time-varying effectiveness of best management practices [BMPs] and STEP + FIXED using fixed effectiveness)

4.2 Impact of stepwise investment on BMP implementation plans

In our case study, the NPVs of the STEP scenarios did not seem to be significantly reduced compared to that of the ONE-2 scenario (e.g., 151.39 in STEP + VARY-MM compared to 155.09 in ONE-2 + VARY). However, from the perspective of the project's start-up fund (i.e., money invested in the first year), STEP scenarios had apparent advantages. For example, the start-up fund of scenario ONE-1 + VARY was 203.75 (CNY 10,000), while that of scenarios STEP + VARY-HH and STEP + VARY-LL were only 88.40 and 57.94 (CNY 10,000), with reductions of 56.61%, and 71.56%, respectively.


From Table 3, we learn that the start-up fund has a positive correlation with overall environmental effectiveness. The cumulative investments over time decreased from the HH to MM, and then to the LL scenario. This phenomenon is precisely in accordance with the processes of environmental effectiveness and investment trade-offs. The more and earlier BMPs implemented, the higher the environmental effectiveness. The less and later BMPs implemented, the lower the NPV will be. Further, from Figure 8b, we can observe obvious inflection points at an NPV of approximately 151, that is, as the NPV of Pareto fronts decreases, the soil erosion reduction rate gradually decreases and declines rapidly after the inflection point. This phenomenon may be caused by low investment in the first year (e.g., the 1st investment is less than the 2nd in the two LL scenarios; Table 3), and most BMPs implemented in and after the second year.

Therefore, by considering stepwise investments for optimizing BMP implementation plans, the significantly reduced burden on start-up funds would undoubtedly improve the flexibility in funding during the entire implementation period. In the meantime, the investments

631 should be made extensively in the first few years (e.g., two or three years in this case study) to
 632 achieve higher environmental effectiveness.

633 4.3 Impact of time-varying effectiveness on BMP implementation plans

634 Two comparisons of time-varying and fixed effectiveness of BMPs (i.e., STEP + FIXED
 635 vs. STEP + VARY and ONE + FIXED vs. ONE + VARY) demonstrated that under the same
 636 NPV, the reduction rates of soil erosion in VARY scenarios decreased by approximately 1.6–
 637 2.8% (Figure 8a). The apparent results are attributed to the representation of BMP effectiveness
 638 data. Inaccurate representation may over- or under-estimate the overall effectiveness of BMP
 639 scenarios, especially in long-term evaluations. Figure 10 depicts a comparison between BMP
 640 scenarios under one-time investments using fixed effectiveness in the first (ONE+FIXED (1))
 641 and the fifth year (ONE+FIXED (5)) and time-varying effectiveness (Table 2). Figure 10
 642 indicates that using reasonable time-varying effectiveness can appropriately reduce the bias in
 643 evaluating the overall effectiveness of the BMP scenario since the “true” effectiveness of BMPs
 644 over time is difficult to measure precisely. Therefore, to minimize this bias or error as much as
 645 possible, researchers are suggested to monitor BMP effectiveness data periodically and
 646 thoroughly. Modelers are meanwhile suggested to reasonably quantify time-varying BMP data
 647 and utilize it in watershed models.

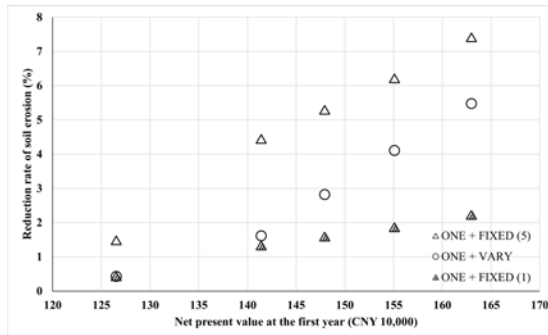

648 Figure 10. Comparison of best management practice (BMP) scenarios under one-time
 649 investments using diverse BMP environmental effectiveness data. ONE + VARY represents the
 650 BMP scenarios under one-time investment using time-varying effectiveness. ONE + FIXED (1)
 651 and ONE + FIXED (5) represent the BMP scenarios under one-time investments using fixed
 652 effectiveness in the first and fifth year, respectively.
 653


654

655 4.4 Qualitative analysis of spatio-temporal distribution of selected BMP scenarios

656 Figure 11 presents spatio-temporal distributions of the six selected representative
 657 scenarios from two STEP Pareto fronts and two ONE-2 scenarios. All scenarios have the same
 658 BMP spatial distribution but different implementation times. With the same NPV and
 659 implementation time, the two ONE-2 scenarios achieved a 6.22% soil erosion reduction rate
 660 based on the fixed effectiveness of BMPs (155.09 NPV, 6.22%) and 4.11% on time-varying
 661 effectiveness (Table 3). Figures 11a–c demonstrated three representative scenarios based on the
 662 time-varying effectiveness of BMPs including STEP + VARY-LL (150.55 NPV, 3.72%), STEP
 663 + VARY-MM (151.39 NPV, 4.11%), and STEP + VARY-HH (155.67 NPV, 4.56%). Figures

664 11d–f demonstrated another three scenarios based on the fixed effectiveness of BMPs including
 665 STEP + FIXED-LL (150.63 NPV, 5.67%), STEP + FIXED-MM (151.77 NPV, 6.20%), and
 666 STEP + FIXED-HH (154.80 NPV, 6.59%).

667

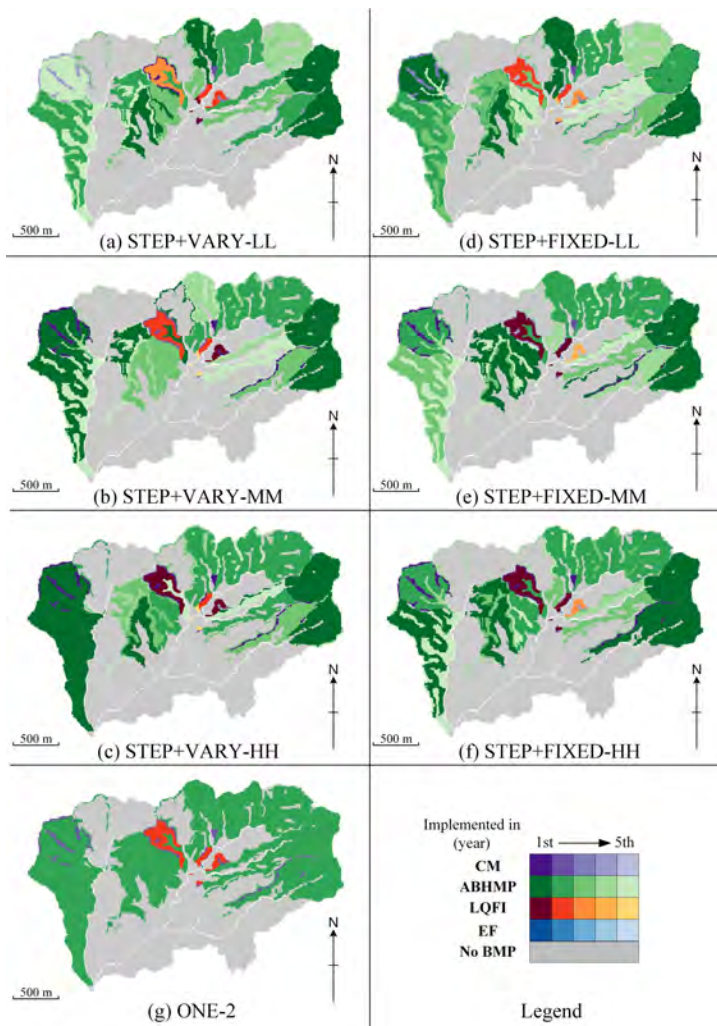

668

669 Figure 11. Spatio-temporal distributions of the representative best management practice (BMP)
 670 scenarios: (a)–(c) represent scenarios of low net present value (NPV) with low soil erosion
 671 reduction rate (LL), moderate NPV with moderate reduction rate (MM), and high NPV with high
 672 reduction rate (HH) of optimization experiments under stepwise investment and fixed BMP
 673 effectiveness (STEP + FIXED), respectively; (d)–(f) represent the corresponding scenarios under
 674 time-varying BMP effectiveness (STEP + VARY); (g) represents the scenarios of both fixed and
 675 time-varying BMP effectiveness under one-time investment in the second year (ONE-2).

676

677 Spatio-temporal distributions of optimized BMP scenarios under stepwise investment
678 exemplified the tacit knowledge that environmental and economic effectiveness of the BMP
679 affect the decision-making of BMP implementation orders under the specific investment plan.
680 For example, BMPs that require high initial and maintenance costs but late returns (e.g., EF) are
681 more likely to be implemented in the mid-to-late stage when investment burden alleviation is a
682 priority (Figures 11a and 11d). BMPs which have high environmental effectiveness and can take
683 effect quickly (e.g., ABHMP) tend to be implemented in large areas in the first stage when
684 focusing more on eco-environmental governance (Figures 11c and 11f). Additionally, BMPs
685 which have moderate performance in overall effectiveness and take effect efficiently (e.g., CM
686 and EF) have more flexibility to be implemented according to diverse investment plans. The
687 proposed framework can provide diverse BMP implementation plans as candidates for decision-
688 makers to further screen and reach a consensus, meeting all the stakeholders' interests.

689

690 4.5 Applicability of the proposed optimization framework

691 Although the proposed **simulation**-optimization framework was implemented and
692 demonstrated through an agricultural watershed management problem, it is designed to be a
693 universal framework that is not related to BMP types, watershed models, optimization
694 algorithms, and applied watershed scales. Similar optimization methods and tools (e.g., the
695 System for Urban Stormwater Treatment and Analysis Integration, SUSTAIN; Lee et al., 2012)
696 can be improved according to the proposed idea from the following key points: (1) incorporating
697 BMP implementation time into the construction of BMP scenarios; that is, for example,
698 updating BMP selection and placement strategies in BMP Optimization of SUSTAIN; (2)
699 considering dynamic economic indicators (e.g., the NPV used in this study) to evaluate the long-
700 term investment; that is, for example, improving the BMP Cost Estimation of SUSTAIN; (3)
701 quantifying time-varying BMP effectiveness data through diverse ways such as integrating
702 sampled data with theoretical analysis; and (4) modifying watershed models to support updating
703 time-varying BMP effectiveness data during the simulation period; that is, for example, the BMP
704 Simulation of SUSTAIN.

705 The ability to support diverse types of BMPs and watershed scales depends on the
706 specific implementation of the proposed framework, especially the watershed model. The
707 watershed model can represent the time-varying effectiveness of the BMP, which may be
708 quantified by the effect of BMP on its governance objective or BMP-related geographic
709 variables. The four BMPs selected in this case study are representative and successful
710 agricultural BMPs in the study area. Some of them can be regarded as a combination of
711 engineering and non-engineering BMPs, such as the economic fruit (EF). The EF requires not
712 only the construction of level terraces, drainage ditches, storage ditches, and irrigation facilities,
713 but also the plantation of economic fruit, grasses, and Fabaceae plants (Table 1). Engineering
714 BMPs (also known as structural BMPs) may have significantly different time-varying
715 effectiveness from non-engineering (or non-structural) BMPs. For example, they may take effect
716 immediately after implementation and achieve periodic high effectiveness over time under
717 maintenance operations. Therefore, it will be meaningful to consider structural and non-
718 structural BMPs in practical application cases.

719 It is worth mentioning that the primary concern of the spatio-temporal optimization of
720 BMPs in a large watershed is the construction of the watershed model and determining the
721 appropriate BMP spatial configuration units. The computational performance of large
722 watershed models may be an important technical issue that can be essentially resolved by
723 utilizing high-performance computing clusters.

724

725 5 Conclusions and future work

726 This study proposed a new simulation-optimization framework for implementation orders
727 of BMPs by considering two important realistic factors: the stepwise investment and time-
728 varying effectiveness of BMPs. The framework was designed based on a widely used spatial
729 optimization framework. ~~This was~~ applied to agricultural and urban BMPs. The proposed
730 framework by extending geographic decision variables to represent BMP implementation time
731 and introducing the concept of NPV into the BMP scenario cost model. It also customized the
732 BMP knowledge base and watershed model to evaluate the environmental effectiveness of BMP
733 scenarios using the time-varying effectiveness of BMPs. Exemplified framework implementation
734 and experimental results demonstrated that optimizations considering stepwise investment could
735 effectively provide more feasible choices with less investment burden at the cost of a slight loss
736 of environmental effectiveness, especially the significantly reduced load on start-up funds
737 compared to those of one-time investments. By accounting for time-varying effectiveness and
738 stepwise investment, the optimized multi-stage BMP scenarios may better reflect the reality of
739 BMP performance and costs over time, providing diverse choices for watershed management
740 decision-making.

741 The flexibility and extensibility of the proposed framework could make it easy to be
742 applied to other technical transplant and implementations of similar simulation-optimization
743 frameworks. The essential components in this framework could be implemented by similar
744 functional techniques to the case study, including multi-objective optimization algorithms and
745 watershed models. Application-specific data and settings could also be extended in this
746 framework, including spatial units for BMP configuration, BMP types and knowledge bases for
747 specific watershed problems, and diverse stepwise investment representations (e.g., range
748 constraints, even distribution). Before implementing a practical application case, the sources of
749 biases or errors in the proposed framework must be known and handled to minimize errors and
750 improve credibility. It is critical to note that the data and modeling method should be highly
751 accurate in its representation for the characteristics of the study area and environmental
752 problems. From this perspective, biases or errors of this proposed framework may be reinduced
753 or avoided by: (1) reasonably describing the time-varying effectiveness of BMPs based on
754 ~~limited~~-observation data and modeling their all-sided effects in watershed models; (2) selecting
755 suitable BMPs and determining the corresponding spatial configuration units and configuration
756 strategies; and (3) reducing the randomness and calculation errors of multi-objective
757 optimization algorithms by incorporating expert knowledge in defining the optimization
758 problem.

759 As intended to be a universal simulation-optimization framework unrelated to BMP
760 types, watershed models, optimization algorithms, and applied watershed scales, there are
761 several issues worth studying in the future, including extensive applications and sensitivity
762 analysis. The wide applications may include: (1) improving other existing simulation-

763 optimization frameworks focused on urban BMPs; (2) explicitly considering structural and non-
764 structural BMPs in case studies; (3) solving BMP optimization problems in large watersheds, and
765 so on. The sensitivity analysis of the proposed framework and specific implementation could be
766 conducted on three sets of parameters to provide feasible suggestions for practical applications.
767 The first is related to the evaluation of watershed responses to BMP scenarios, including the
768 proper evaluation period length. Correspondingly, the second parameter set concerns the
769 economic calculation of BMP scenarios, including the discount rate for NPV calculation. The
770 last parameter set is the optimization algorithm settings, including crossover and mutation
771 operators, maximum generation number, and population size.

772 Overall, this study proposed and demonstrated the novel idea of extending the spatial
773 optimization of BMPs to the spatio-temporal level by considering the stepwise investment,
774 which is a realistic constraint that must be taken into account during decision-making. This study
775 also emphasized the value of integrating physical geographic processes (i.e., watershed response
776 to various spatio-temporal distributions of BMPs) and anthropogenic influences (i.e., stepwise
777 investment) in the design, implementation, and application of more flexible, robust, and feasible
778 geospatial analysis methods.

779

780 **Acknowledgments**

781 This work was supported by grants from the Chinese Academy of Sciences (Project No.:
782 XDA23100503), the National Natural Science Foundation of China (Project No.: 41871362,
783 42101480, and 41871300), and the 111 Program of China (Approval Number: D19002).

784 We greatly appreciate the support to A-Xing Zhu through the Vilas Associate Award, the
785 Hammel Faculty Fellow Award, and the Manasse Chair Professorship from the University of
786 Wisconsin-Madison.

787 We thank the Tianhe-2 supercomputer for supporting the computationally intensive
788 experiments in this study.

789

790 **Open Research**

791 The improved SEIMS ~~framework~~ programs and the prepared data are freely available
792 ~~at~~ <https://doi.org/10.5281/zenodo.7048969>. The Youwuzhen watershed spatio-temporal
793 datasets are located in the /SEIMS/data/youwuzhen/data_prepare folder. These include
794 precipitation and meteorological data, look-up tables, spatial data, and BMP data. Both sets of
795 fixed BMP and time-varying BMP effectiveness used in the case study are included in the BMP
796 data (the scenario subfolder).

797

798

799 **References**

- 800 Arabi, M., Govindaraju, R. S., & Hantush, M. M. (2006). Cost-effective allocation of watershed
801 management practices using a genetic algorithm. *Water Resources Research*, 42(10),
802 W10429. <https://doi.org/10.1029/2006WR004931>
- 803 Arabi, M., Govindaraju, R. S., Hantush, M. M., & Engel, B. A. (2006). Role of watershed
804 subdivision on modeling the effectiveness of best management practices with SWAT.
805 *Journal of the American Water Resources Association (JAWRA)*, 42(2), 513–528.
806 <https://doi.org/10.1111/j.1752-1688.2006.tb03854.x>
- 807 Arnold, J. G., Kiniry, J. R., Srinivasan, R., Williams, J. R., Haney, E. B., & Neitsch, S. L.
808 (2012). Soil and water assessment tool input/output documentation version 2012. Texas
809 Water Resources Institute.
- 810 Babbar-Sebens, M., Barr, R. C., Tedesco, L. P., & Anderson, M. (2013). Spatial identification
811 and optimization of upland wetlands in agricultural watersheds. *Ecological Engineering*, 52,
812 130–142. <https://doi.org/10.1016/j.ecoleng.2012.12.085>
- 813 Bekele, E. G., & Nicklow, J. W. (2005). Multiobjective management of ecosystem services by
814 integrative watershed modeling and evolutionary algorithms. *Water Resources Research*,
815 41(10), W10406. <https://doi.org/10.1029/2005WR004090>
- 816 Bracmort, K. S., Engel, B. A., & Frankenberger, J. R. (2004). Evaluation of structural best
817 management practices 20 years after installation: Black creek watershed, Indiana. *Journal*
818 *of Soil and Water Conservation*, 59(5), 191–196.
- 819 Chen, L., Wei, G. Y., & Shen, Z. Y. (2016). Incorporating water quality responses into the
820 framework of best management practices optimization. *Journal of Hydrology*, 541, 1363–
821 1374. <https://doi.org/10.1016/j.jhydrol.2016.08.038>

- 822 Chen, S., Zha, X., Bai, Y., & Wang, L. (2019). Evaluation of soil erosion vulnerability on the
823 basis of exposure, sensitivity, and adaptive capacity: A case study in the Zhuxi watershed,
824 Changting, Fujian Province, Southern China. *CATENA*, 177, 57–69.
825 <https://doi.org/10.1016/j.catena.2019.01.036>
- 826 Chen, Z., Chen, Z., & Yue, H. (2013). *Comprehensive research on soil and water conservation*
827 *in granite red soil region: A case study of Zhuxi watershed, Changting County, Fujian*
828 *Province*. Beijing, China: Science Press. (in Chinese)
- 829 Deb, K., Pratap, A., Agarwal, S., & Meyarivan, T. (2002). A fast and elitist multiobjective
830 genetic algorithm: NSGA-II. *IEEE Transactions on Evolutionary Computation*, 6(2), 182–
831 197. <https://doi.org/10.1109/4235.996017>
- 832 ~~Dong, F., Liu, Y., Wu, Z., Chen, Y., & Guo, H. (2018). Identification of watershed priority~~
833 ~~management areas under water quality constraints: A simulation optimization approach~~
834 ~~with ideal load reduction. *Journal of Hydrology*, 562, 577–588.~~
835 ~~<https://doi.org/10.1016/j.jhydrol.2018.05.033>~~
- 836 Emerson, C. H., & Traver, R. G. (2008). Multiyear and seasonal variation of infiltration from
837 storm-water best management practices. *Journal of Irrigation and Drainage Engineering*,
838 134(5), 598–605. [https://doi.org/10.1061/\(ASCE\)0733-9437\(2008\)134:5\(598\)](https://doi.org/10.1061/(ASCE)0733-9437(2008)134:5(598))
- 839 Emerson, C. H., Wadzuk, B. M., & Traver, R. G. (2010). Hydraulic evolution and total
840 suspended solids capture of an infiltration trench. *Hydrological Processes*, 24(8), 1008–
841 1014. <https://doi.org/10.1002/hyp.7539>
- 842 Gaddis, E. J. B., Voinov, A., Seppelt, R., & Rizzo, D. M. (2014). Spatial optimization of best
843 management practices to attain water quality targets. *Water Resources Management*, 28(6),
844 1485–1499. <https://doi.org/10.1007/s11269-013-0503-0>

- 845 Gitau, M. W., Veith, T. L., & Gburek, W. J. (2004). Farm-level optimization of BMP placement
846 for cost-effective pollution reduction. *Transactions of the ASAE*, 47(6), 1923–1931.
847 <https://doi.org/10.13031/2013.17805>
- 848 Hou, J. W., Zhu, M. Y., Wang, Y. J., & Sun, S. Q. (2020). Optimal spatial priority scheme of
849 urban LID-BMPs under different investment periods. *Landscape and Urban Planning*,
850 202(2020), 103858. <https://doi.org/10.1016/j.landurbplan.2020.103858>
- 851 Jang, T., Vellidis, G., Hyman, J. B., Brooks, E., Kurkalova, L. A., Boll, J., & Cho, J. (2013).
852 Model for prioritizing best management practice implementation: sediment load reduction.
853 *Environmental Management*, 51(1), 209–224. <https://doi.org/10.1007/s00267-012-9977-4>
- 854 Kalcic, M. M., Frankenberger, J., & Chaubey, I. (2015). Spatial optimization of six conservation
855 practices using swat in tile-drained agricultural watersheds. *Journal of the American Water*
856 *Resources Association (JAWRA)*, 51(4), 956–972. <https://doi.org/10.1111/1752-1688.12338>
- 857 Khan, M. Y., & Jain, P. K. (1999). *Theory and problems in financial management*. New Delhi:
858 Tata McGraw-Hill Education.
- 859 Kreig, J. A. F., Ssegane, H., Chaubey, I., Negri, M. C., & Jager, H. I. (2019). Designing
860 bioenergy landscapes to protect water quality. *Biomass and Bioenergy*, 128, 105327.
861 <https://doi.org/10.1016/j.biombioe.2019.105327>
- 862 Lee, J.G., Selvakumar, A., Alvi, K., Riverson, J., Zhen, J.X., Shoemaker, L., & Lai, F.H. (2012).
863 A watershed-scale design optimization model for stormwater best management practices.
864 *Environmental Modelling & Software*, 37, 6–18.
865 <https://doi.org/10.1016/j.envsoft.2012.04.011>

Formatted: Font: Italic

- 866 Liao, X., Xiao, L., Yang, C., & Lu, Y. (2014). MilkyWay-2 supercomputer: system and
867 application. *Frontiers of Computer Science*, 8(3), 345–356. [https://doi.org/10.1007/s11704-](https://doi.org/10.1007/s11704-014-3501-3)
868 014-3501-3
- 869 Lin, J. (2005). Effect of Different Practices on Soil Quality in the Serious Erosion Area. (Master
870 Thesis). Fuzhou, China: Fujian Agriculture and Forestry University, ~~Fuzhou, China~~. (in
871 Chinese with English abstract)
- 872 Liu, G., Chen, L., Wang, W., Sun, C., & Shen, Z. (2020). A water quality management
873 methodology for optimizing best management practices considering changes in long-term
874 efficiency. *Science of The Total Environment*, 725(2020), 138091.
875 <https://doi.org/10.1016/j.scitotenv.2020.138091>
- 876 Liu, J., Zhu, A. X., Qin, C.Z., Wu, H., & Jiang, J. (2016). A two-level parallelization method for
877 distributed hydrological models. *Environmental Modelling & Software*, 80, 175–184.
878 <https://doi.org/10.1016/j.envsoft.2016.02.032>
- 879 Liu, Y., Engel, B., Flanagan, D., Gitau, M., McMillan, S., Chaubey, I., & Singh, S. (2018).
880 Modeling framework for representing long-term effectiveness of best management practices
881 in addressing hydrology and water quality problems: Framework development and
882 demonstration using a Bayesian method. *Journal of Hydrology*, 560(2018), 530–545.
883 <https://doi.org/10.1016/j.jhydrol.2018.03.053>
- 884 Liu, Y. Z., Guo, T., Wang, R. Y., Engel, B. A., Flanagan, D. C., Li, S. Y., et al. (2019). A
885 SWAT-based optimization tool for obtaining cost-effective strategies for agricultural
886 conservation practice implementation at watershed scales. *Science of The Total*
887 *Environment*, 691, 685–696. <https://doi.org/10.1016/j.scitotenv.2019.07.175>

- 888 Maringanti, C., Chaubey, I., Arabi, M., & Engel, B. (2011). Application of a multi-objective
889 optimization method to provide least cost alternatives for NPS pollution control.
890 *Environmental Management*, 48(3), 448–461. <https://doi.org/10.1007/s00267-011-9696-2>
- 891 Pionke, H. B., Gburek, W. J., & Sharpley, A. N. (2000). Critical source area controls on water
892 quality in an agricultural watershed located in the Chesapeake Basin. *Ecological*
893 *Engineering*, 14(4), 325–335. [https://doi.org/10.1016/S0925-8574\(99\)00059-2](https://doi.org/10.1016/S0925-8574(99)00059-2)
- 894 Qin, C. Z., Gao, H. R., Zhu, L. J., Zhu, A. X., Liu, J. Z., & Wu, H. (2018). Spatial optimization
895 of watershed best management practices based on slope position units. *Journal of Soil and*
896 *Water Conservation*, 73(5), 504–517. <https://doi.org/10.2489/jswc.73.5.504>
- 897 Raei, E., Alizadeh, M. R., Nikoo, M. R., & Adamowski, J. (2019). Multi-objective decision-
898 making for green infrastructure planning (LID-BMPs) in urban storm water management
899 under uncertainty. *Journal of Hydrology*, 579, 124091.
900 <https://doi.org/10.1016/j.jhydrol.2019.124091>
- 901 Rana, V. K., & Suryanarayana, T. M. V. (2020). GIS-based multi criteria decision making
902 method to identify potential runoff storage zones within watershed. *Annals of GIS*, 26(2),
903 149–168. <https://doi.org/10.1080/19475683.2020.1733083>
- 904 Saxton, K. E., & Rawls, W. J. (2006). Soil water characteristic estimates by texture and organic
905 matter for hydrologic solutions. *Soil Science Society of America Journal*, 70(5), 1569–1578.
906 <https://doi.org/10.2136/sssaj2005.0117>
- 907 Shen, S., & Zhu, L.J. (2022). Optimization framework for implementation orders of Watershed
908 Best Management Practices (BMPs) (1.0.0) [Software]. Zenodo.
909 <https://doi.org/10.5281/zenodo.7048969>

Formatted: Font: Italic

Formatted: Font: Italic

- 910 Shen, Z., Zhong, Y., Huang, Q., & Chen, L. (2015). Identifying non-point source priority
911 management areas in watersheds with multiple functional zones. *Water Research*, 68, 563–
912 571. <https://doi.org/10.1016/j.watres.2014.10.034>
- 913 Shi, X., Yang, G., Yu, D., Xu, S., Warner, E. D., Petersen, G. W., et al. (2010). A WebGIS
914 system for relating genetic soil classification of China to soil taxonomy. *Computers &*
915 *Geosciences*, 36(6), 768–775. <https://doi.org/10.1016/j.cageo.2009.10.005>
- 916 Srinivasan, M. S., Gérard-Marchant, P., Veith, T. L., Gburek, W. J., & Steenhuis, T. S. (2005).
917 Watershed scale modeling of critical source areas of runoff generation and phosphorus
918 transport. *Journal of the American Water Resources Association (JAWRA)*, 41(2), 361–377.
919 <https://doi.org/10.1111/j.1752-1688.2005.tb03741.x>
- 920 Srivastava, P., Hamlett, J., Robillard, P., & Day, R. L. (2002). Watershed optimization of best
921 management practices using AnnAGNPS and a genetic algorithm. *Water resources*
922 *research*, 38(3), 1021. <https://doi.org/10.1029/2001WR000365>
- 923 Veith, T. L., Wolfe, M. L., & Heatwole, C. D. (2003). Optimization procedure for cost effective
924 bmp placement at a watershed scale. *Journal of the American Water Resources Association*
925 *(JAWRA)*, 39(6), 1331–1343. <https://doi.org/10.1111/j.1752-1688.2003.tb04421.x>
- 926 Wang, B., Zhang, G.H., Shi, Y.Y., Zhang, X. C., Ren, Z.P., & Zhu, L.J. (2013). Effect of natural
927 restoration time of abandoned farmland on soil detachment by overland flow in the Loess
928 Plateau of China. *Earth Surface Processes and Landforms*, 38(14), 1725–1734.
929 <https://doi.org/10.1002/esp.3459>
- 930 Wang, X. (2008). *Comprehensive benefits evaluation of soil erosion control models and*
931 *establishing the control paradigm in red soil region*. Huazhong Agricultural University,
932 Wuhan, China. (in Chinese with English abstract)

- 933 White, M. J., Storm, D. E., Busteed, P. R., Stoodley, S. H., & Phillips, S. J. (2009). Evaluating
934 nonpoint source critical source area contributions at the watershed scale. *Journal of*
935 *Environmental Quality*, 38(4), 1654–1663. <https://doi.org/10.2134/jeq2008.0375>
- 936 Wu, H., Zhu, A. X., Liu, J., Liu, Y., & Jiang, J. (2018). Best management practices optimization
937 at watershed scale: incorporating spatial topology among fields. *Water Resources*
938 *Management*, 32(1), 155–177. <https://doi.org/10.1007/s11269-017-1801-8>
- 939 Wu, T., Zhu, L.-J., Shen, S., Zhu, A.-X., Shi, M., & Qin, C.-Z. (2023). Identification of
940 watershed priority management areas based on landscape positions: An implementation
941 using SWAT+. *Journal of Hydrology*, 619, 129281.
942 <https://doi.org/10.1016/j.jhydrol.2023.129281>
- 943 Zhu, L.J., Liu, J., Qin, C.Z., & Zhu, A. X. (2019). A modular and parallelized watershed
944 modeling framework. *Environmental Modelling & Software*, 122, 104526.
945 <https://doi.org/10.1016/j.envsoft.2019.104526>
- 946 Zhu, L.J., Qin, C.Z., Zhu, A.X., Liu, J., & Wu, H. (2019). Effects of different spatial
947 configuration units for the spatial optimization of watershed best management practice
948 scenarios. *Water*, 11(2), 262. <https://doi.org/10.3390/w11020262>
- 949 Zhu, L.J., Qin, C.Z., & Zhu, A.X. (2021). Spatial optimization of watershed best management
950 practice scenarios based on boundary-adaptive configuration units. *Progress in Physical*
951 *Geography: Earth and Environment*, 45(2), 207–227.
952 <https://doi.org/10.1177/0309133320939002>
- 953 Zhu, P., Zhang, G., Wang, H., Zhang, B., & Wang, X. (2020). Land surface roughness affected
954 by vegetation restoration age and types on the Loess Plateau of China. *Geoderma*, 366,
955 114240. <https://doi.org/10.1016/j.geoderma.2020.114240>

Field Code Changed

Formatted: Font: 12 pt

Formatted: Indent: Left: 0", Hanging: 2 ch

Formatted: Font: 12 pt, Italic

Formatted: Font: 12 pt

- 956 Zitzler, E., Thiele, L., Laumanns, M., Fonseca, C. M., & da Fonseca, V. G. (2003). Performance
957 assessment of multiobjective optimizers: an analysis and review. *IEEE Transactions on*
958 *Evolutionary Computation*, 7(2), 117–132. <https://doi.org/10.1109/TEVC.2003.810758>
- 959 Žižlavský, O. (2014). Net present value approach: method for economic assessment of
960 innovation projects. *Procedia - Social and Behavioral Sciences*, 156, 506–512.
961 <https://doi.org/10.1016/j.sbspro.2014.11.230>
- 962